

## Flush-mounted dimmer T35

Item-no.: 3500x0000



Suitable for incandescent- and HV-halogen lamps

Compatible with common switch ranges from GIRA, Busch Jäger, Berker, Jung etc.

Opportunities for optimized and flicker-free dimming of LED lamps in min. area

Short-circuit, overload and over-temperature protection

No stand-by consumption because of a real on/off switch

EHMANN advantage - 100 % quality assurance, 5 years warranty, German manufacturer

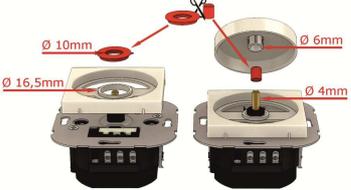
EHMANN service - Switch range adapter included

EHMANN quality - High-grade manufacturing and reliable function



## Flush-mounted dimmer T35

### Technical data

<p><b>60 - 600 W/VA</b> <b>Rated power</b></p>	<p><b>230 V ~ (+/- 10%) / 50 Hz</b> <b>Rated voltage</b></p>	
<p>Suitable for incandescent- and HV-halogen lamps</p>		
<p>Operating principle: leading edge          Function: rotation dimmer with pressure two-way switch, illuminable          Shaft: metal shaft <math>\varnothing</math> 4 mm with fine raster (<math>\varnothing</math> 6 mm with shaft adapter)          Connection: screw terminals up to 2 x 2.5 mm<sup>2</sup> (rigid)          Temperature protection: thermal fuse          Overload/short-circuit protection: fuse T2,5AH/250V (incl. spare fuse)</p>		      
<p><b>Switch range adapter</b>          Allows the use of common switch programs e.g. Gira, Busch-Jäger, Jung, Berker</p> 	<p><b>Opportunity for flicker-free dimming</b>          In case of flickering during dimming, you can try to adjust in the lowest dimming range the minimum brightness and try to optimize the dimming behavior.</p> <p><b>Min</b></p> 	
<p>Item-no. 3500x0000      EAN 401209635000 2      PU 10</p> <p style="text-align: right;">71 x 71 x 33 mm Dimensions (L x W x H)</p>		