

Electronic LED cord dimmer T24.18

Item-no.: 2401x0800(i) (transparent) | 2421x0800(i) (black) | 2461x0800(i) (white)



LED multi-dimmer for reliable dimming, regardless of producer and type of LED

Suitable for dimmable filament LEDs, LED drivers, LED lamps, incandescent and HV-halogen lamps

SILENT TECHNOLOGY – Operates utterly quiet

Opportunities for optimized and flicker-free dimming of LED lamps in min. and max. area

Comfortable full-surface operation (push-dim)

Electronic overload/short-circuit protection, over-temperature protection through thermal fuse

Soft start and memory function plus (even after zero voltage, e.g. switchable outlet)

Decent orientation light to find the dimmer easily in the dark

Space to integrate your individual inlay (inlay not included in delivery)

Integrated protective conductor terminal

EHMANN advantage – 100 % quality checks, 5 years warranty, German manufacturer









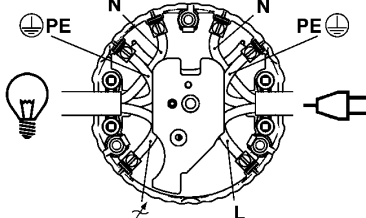
EHMANN service – Up to date LED recommendation accessible via imprinted QR-code at any time

EHMANN quality – High-grade manufacturing and reliable function



Electronic LED cord dimmer T24.18

Technical data

3 – 55 W LED rated power	5 – 150 W/VA Rated power	230 V ~ (+/- 10%) / 50 Hz Rated voltage
Suitable for dimmable filament LEDs, LED lamps, incandescent and HV-halogen lamps		
<p>Operating principle: leading edge</p> <p>Function: On/off/dim via push button (hand- and foot actuation)</p> <p>Temperature protection: thermal fuse</p> <p>Overload/short-circuit protection: Electronic</p> <p>Max. cord diameter: 7,5 mm</p> <p>Individual inlay: Ø50 x 3mm (space), 50g (max. weight)</p> <p>Cut-off: Electronic ϵ</p> <p>Cycle of operation: > 50.000</p> <p>Connection: Screw terminal 0,5 - 1,5 mm² (flexible)</p> <p>Mode of operation: S1</p> <p>Protection class: II</p> <p>Safety class: IP20</p> <p>Contamination level: 1</p>	<div style="display: flex; flex-wrap: wrap; justify-content: space-around;"> <div style="border: 1px solid black; padding: 2px; margin: 2px;">LED</div> <div style="border: 1px solid black; padding: 2px; margin: 2px;">HALO GEN</div> <div style="border: 1px solid black; padding: 2px; margin: 2px;"></div> <div style="border: 1px solid black; padding: 2px; margin: 2px;"></div> <div style="border: 1px solid black; padding: 2px; margin: 2px;">CE</div> <div style="border: 1px solid black; padding: 2px; margin: 2px;"></div> <div style="border: 1px solid black; padding: 2px; margin: 2px;"></div> <div style="border: 1px solid black; padding: 2px; margin: 2px;">REACH 1907/2006</div> <div style="border: 1px solid black; padding: 2px; margin: 2px;"></div> <div style="border: 1px solid black; padding: 2px; margin: 2px;">RoHS 2011/65/EU</div> </div> <p>Checked by:</p> 	
<p>Opportunities for optimized and flicker-free dimming of LED lamps</p> <p>In case of flickering-effects during dimming an LED lamp, there is the possibility of adjusting the minimum and maximum brightness, in order to optimize the dimming behavior.</p> 	<p>LED recommendation</p> <p>Shows which LEDs are compatible with this dimmer.</p> <p>Available via QR code or online at www.ehmann-gmbh.de</p> 	<p>Connection diagram</p> 
<p>Item-no. 24010800(i) (transparent) EAN 401209600628 2 PU 10</p> <p>Item-no. 2421x0800(i) (black) EAN 401209600607 7 PU 10</p> <p>Item-no. 2461x0800(i) (white) EAN 401209600608 4 PU 10</p>	<p>Ø 75 x 26 mm Dimensions (Ø x H)</p>	