

Cord dimmer T25.10

Item-no.: 2501x0000(i) (transparent) | 2521x0000(i) (black) | 2551x0000(i) (gold) | 2561x0000(i) (white)



Suitable for dimmable incandescent-, HV-halogen- und LV-halogen lamps with magnetic transformer

Overload/short-circuit protection

Integrated protective conductor terminal









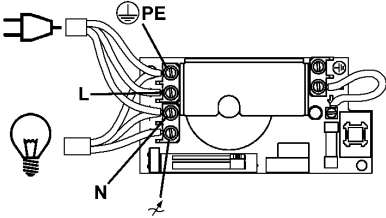
EHMANN advantage - 100 % quality assurance, 5 years warranty, German manufacturer

EHMANN quality – High-grade manufacturing and reliable function



Cord dimmer T25.10

Technical data

| | | |
|--|---|---|
| | 20 – 500W/VA Rated power | 230 V ~ (+/- 10%) / 50 Hz Rated voltage |
| Suitable for dimmable incandescent-, HV-halogen- und LV-halogen lamps with magnetic transformer | | |
| <p>Operating principle: leading edge</p> <p>Function: On/off/dim via slide switch (hand- and foot actuation)</p> <p>Overload/short circuit protection: fuse 5x20mm T2AH/250 V</p> <p>Max. cord diameter: 8 mm</p> <p>Cut-off: Electronic ϵ</p> <p>Cycle of operation: > 50.000</p> <p>Connection: Screw terminal 0,5 - 1,5 mm² (flexible)</p> <p>Mode of operation: S1</p> <p>Protection class: II</p> <p>Safety class: IP20</p> <p>Contamination level: 1</p> |         | |
| | | <p>Connection diagram</p>  |
| <p>Item-no. 2501x0000(i) (transparent) EAN 401209600280 2 PU 10</p> <p>Item-no. 2521x0000(i) (black) EAN 401209625210 8 PU 10</p> <p>Item-no. 2551x0000(i) (gold) EAN 401209625511 6 PU 10</p> <p>Item-no. 2561x0000(i) (white) EAN 401209600163 8 PU 10</p> | <p>107 x 60 x 30 mm Dimensions (L x W x H)</p> | |