

Cord dimmer T26

Item-no.: 2600x0000(i) (transparent) | 2620x0000(i) (black) | 2660x0000(i) (white)



Suitable for incandescent, HV- and LV-halogen lamps with magnetic transformer

Overload/short-circuit protection

Integrated protective conductor terminal

With orientation light

Applicable as intermediate and end device due to different connection opportunities


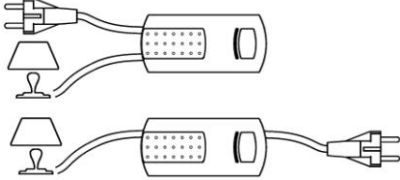
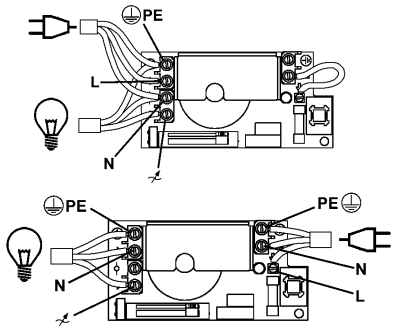
EHMANN advantage – 100 % quality check, 5 years warranty, German manufacturer

EHMANN quality – High-grade manufacturing and reliable function



Cord dimmer T26

Technical data

| | 20 – 500W/VA Rated power | 230 V ~ (+/- 10%) / 50 Hz Rated voltage |
|--|---|--|
| Suitable for incandescent-, HV- and LV-halogen lamps with mag. transformer | | |
| <p>Operating principle: leading edge</p> <p>Function: On /off via separate switch; dimming via slide switch (for hand- and foot use)</p> <p>Temperature protection: thermal fuse</p> <p>Overload/short-circuit protection: fuse 5x20mm T2AH/250 V</p> <p>Max. cord diameter: 6,5 mm</p> <p>Cut-off: Complete cut-off</p> <p>Stand-by consumption (orientation light): <0,5 W</p> <p>Cycle of operation: >50.000</p> <p>Connection: Screw terminal 0,5 - 1,5 mm² (flexible)</p> <p>Mode of operation: S1</p> <p>Protection class: II</p> <p>Safety class: IP20</p> <p>Contamination level: 1</p> |  | |
| <p>Applicable as intermediate or end device</p>  | <p>Connection diagram</p>  | |
| <p>Item-no. 2600x0000(i) (transparent) EAN 4012096006718 PU 10</p> <p>Item-no. 2620x0000(i) (black) EAN 401209626200 8 PU 10</p> <p>Tem-no. 2660x0000(i) (white) EAN 401209626600 6 PU 10</p> | <p>130 x 59 x 35 mm Dimensions (L x W x H)</p> | |