

Flush-mounted dimmer T38

Item-no.: 3800x0000



Suitable for incandescent- and HV-halogen lamps

Compatible with common switch ranges from GIRA, Busch Jäger, Berker, Jung etc.

Opportunities for optimized and flicker-free dimming of LED lamps in min. area

Short-circuit, overload and over-temperature protection

No stand-by consumption because of a real on/off switch

EHMANN advantage - 100 % quality assurance, 5 years warranty, German manufacturer








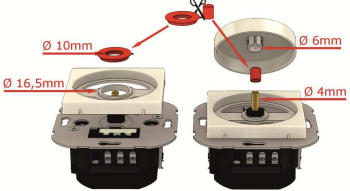

EHMANN service - Switch range adapter included

EHMANN quality - High-grade manufacturing and reliable function



Flush-mounted dimmer T38

Technical data

<p>75 - 800 W/VA Rated power</p>	<p>230 V ~ (+/- 10%) / 50 Hz Rated voltage</p>	
<p>Suitable for incandescent- and HV-halogen lamps</p>		
<p>Operating principle: leading edge Function: rotation dimmer with pressure two-way switch Shaft: metal shaft \varnothing 4 mm with fine raster (\varnothing 6 mm with shaft adapter) Connection: screw terminals up to 2 x 2.5 mm² (rigid) Temperature protection: thermal fuse Overload/short-circuit protection: fuse T4AH/250V (incl. spare fuse)</p>	      	
<p>Switch range adapter Allows the use of common switch programs e.g. Gira, Busch-Jäger, Jung, Berker</p> 	<p>Opportunity for flicker-free dimming In case of flickering during dimming, you can try to adjust in the lowest dimming range the minimum brightness and try to optimize the dimming behavior.</p> <p>Min</p> 	
<p>Item-no. 3800x0000 EAN 401209638000 9 PU 10</p>	<p>71 x 71 x 33 mm Dimensions (L x W x H)</p>	