

USB-C flush-mounted charger T65.02 Comfort with Power Delivery (PD)

Item-no.: 6560x0200



USB-C flush-mounted insert with cover (white, 55x55mm) for installation into standard flush-mounted boxes Ø 65mm with device screws (!), installation according to DIN 49073

Compatible with 55x55 switch range programmes (inner dimensions of frame 55x55mm) white, similar to RAL9010 (e.g. Busch Balance SI by Busch-Jaeger or Standard 55 by GIRA, etc.)

18-Watt power supply with power delivery (PD) fast charging, for fast and safe charging of laptops, tablets, smartphones, wearables and further small electronic devices with USB-C port

Variable power adjustment: up to 18W

Supports different charging protocols e.g. QC2.0/QC3.0, FCP, AFC, BC1.2, APPLE

Screw terminal to connect wires of the house installation, up to 2,5mm² max. (2xL/2xN – for easy looping in multiframes)

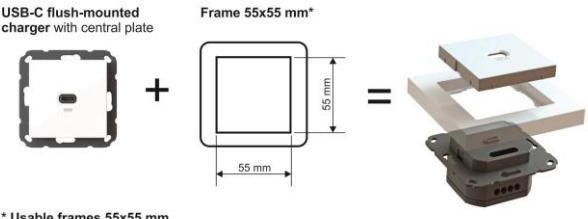


EHMANN advantage - 100% quality control, 5 years warranty

EHMANN quality – High-grade manufacturing and reliable function



USB-C flush-mounted charger T65.02 Comfort with Power Delivery (PD)

Technical data

<p>Power: max. 18 W 1x USB-C Output</p>	<p>110 - 230V / 50-60 Hz Input Voltage</p>	<p>5 - 12V Output Voltage</p>																								
 <p>USB-C flush-mounted charger with central plate + Frame 55x55 mm*</p> <p>* Usable frames 55x55 mm GIRA pure white Standard 55, E2, E22, Event, Esprit BUSCH JAEGER alpine white Busch balance SI JUNG alpine white A 500, A PLUS, A CREATION, AS 500, A550, A FLOW BERKER polar white S1, B3, B7 MERTEN polar white 1M, M-Smart, M-Plan, M-Pure</p> <p>All listed white shades are similar to RAL9010</p>		<table border="1"> <thead> <tr> <th></th> <th>Professional</th> <th>Kombi</th> <th>Comfort</th> </tr> </thead> <tbody> <tr> <td> <ul style="list-style-type: none"> ● = Fast charging ● = Slow charging ✗ = No charging / use at the same time </td> <td> USB-C (65W max.) 5V/3A 15W 9V/3A 27W 12V/3A 36W 15V/3A 45W 20V/3.25A 65W </td> <td> USB-C (45W max.) 5V/3A 15W 9V/3A 27W 12V/3A 36W 15V/3A 45W 20V/2.25A 45W USB-A (11W max.) 5V/3A 15W </td> <td> USB-C (18W max.) 5V/3A 15W 9V/2A 18W 12V/1.5A 18W </td> </tr> <tr> <td>5W Wearables</td> <td>✓</td> <td>✓</td> <td>✓</td> </tr> <tr> <td>15W (max. 25W) Smartphones</td> <td>✓</td> <td>✓</td> <td>✓</td> </tr> <tr> <td>18W (max. 30W) Tablets</td> <td>✓</td> <td>✓</td> <td>✓</td> </tr> <tr> <td>65W (max. 100W) Laptops</td> <td>✓</td> <td>●</td> <td>✗</td> </tr> </tbody> </table>		Professional	Kombi	Comfort	<ul style="list-style-type: none"> ● = Fast charging ● = Slow charging ✗ = No charging / use at the same time 	USB-C (65W max.) 5V/3A 15W 9V/3A 27W 12V/3A 36W 15V/3A 45W 20V/3.25A 65W	USB-C (45W max.) 5V/3A 15W 9V/3A 27W 12V/3A 36W 15V/3A 45W 20V/2.25A 45W USB-A (11W max.) 5V/3A 15W	USB-C (18W max.) 5V/3A 15W 9V/2A 18W 12V/1.5A 18W	5W Wearables	✓	✓	✓	15W (max. 25W) Smartphones	✓	✓	✓	18W (max. 30W) Tablets	✓	✓	✓	65W (max. 100W) Laptops	✓	●	✗
	Professional	Kombi	Comfort																							
<ul style="list-style-type: none"> ● = Fast charging ● = Slow charging ✗ = No charging / use at the same time 	USB-C (65W max.) 5V/3A 15W 9V/3A 27W 12V/3A 36W 15V/3A 45W 20V/3.25A 65W	USB-C (45W max.) 5V/3A 15W 9V/3A 27W 12V/3A 36W 15V/3A 45W 20V/2.25A 45W USB-A (11W max.) 5V/3A 15W	USB-C (18W max.) 5V/3A 15W 9V/2A 18W 12V/1.5A 18W																							
5W Wearables	✓	✓	✓																							
15W (max. 25W) Smartphones	✓	✓	✓																							
18W (max. 30W) Tablets	✓	✓	✓																							
65W (max. 100W) Laptops	✓	●	✗																							
<p>Supported protocols:</p> <p>QC2.0/QC3.0, FCP 5V/9V/12V, AFC 9V, BC1.2 5V/1.5A, APPLE 5V/2.4A PD</p>																										
<p>Connection: screw terminals up to 2,5 mm² (rigid) Power consumption/Stand-by: < 0,08W Short circuit/overload protection: electronic</p> <p>In order to guarantee maximum charging power, please pay attention to using original / PD charging cables.</p>																										
<p>Before installing and using the device, please read the instruction manual carefully.</p>																										
<p>Item-no. 6560x0200</p>	<p>EAN 4012096011521</p>	<p>PU 10 Weight: net 100g</p>	<p>71 x 71 x 37 mm Dimension (L x W x H)</p>																							