

Medical aluminum socket strip Terra 4-fold IEC-lock, 4 ZPA

Item-no.: 0860x05042033 (3 m power cord)


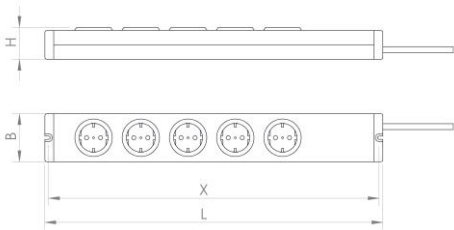






- Noble, transparent anodized aluminum case, matt
- 4-fold IEC cold device sockets C13 with lock function, black
- Shock-Resist end caps with mounting possibility
- Optical function indication
- Overload/short-circuit protection via double fuse (2-pole)
- Additional 4 equipotential bonding sockets (ZPA) according to DIN 42801
- Equipotential bonding cable with PA-connector, 3m
- Simple assembling through universal claws
- Constructed and checked according to DIN EN 60601-1 and DIN EN ISO 80601-2-13
- Usable in medically used rooms of group 2, according to VDE part 710



Medical aluminum socket strip, Terra 4-fold IEC-lock, 4 ZPA

Technical data

2.500 W Power	230 V ~ (+/- 10%) / 50 Hz Rated voltage	10 A Rated current
<p>Power cord: 3 m HAWAMED H05VV-F 3G1,5 mm², black, with bend protection</p> <p>Plug: CEE 7/7 plug, angled, type EF, injected, transparent (according to HAWAMED Medical Grade HWN B14B0296)</p> <p>Sockets: IEC cold device sockets C13 with lock function</p> <p>Optical function indication: green</p> <p>Overload/short-circuit protection: 2x fuse T 10 A</p> <p>Equipotential Bonding: 4 x additional equipotential bonding sockets (ZPA)</p> <p>Equipotential bonding cable: Length 3m, cross section 4.0mm² with PA-connector</p> <p>Mounting possibilities:</p> <ul style="list-style-type: none"> - At the end caps: with screws or cable ties - At the M5 thread inserts on the backside: with a universal claw (<i>not included in the scope of delivery</i>), twisting moment of the nut: max. 6 Nm, screw length: min. 9mm/max. 13mm, for fixing on round tubes or standard rails <p>Shock-Resist end caps: made of stainless steel and glass fiber reinforced plastic</p> <p>Safety class: IP20</p>		
 <p>(similar illustration)</p>		   
<p>Item-no. 0860x05042033 (3m cord) EAN 4012096010159</p> <p>Alternative cable types and lengths are available on request.</p>		<p>357 x 65 x 65.5 mm Dimensions (L x W x H)</p>