

USB-A/C flush-mounted charger T65.01 Kombi with Power Delivery (PD)

Item-no.: 6560x0100



USB-C flush-mounted insert with cover (white, 55x55mm) for installation into standard flush-mounted boxes Ø 65mm with device screws (!), installation according to DIN 49073

Compatible with 55x55 switch range programmes (inner dimensions of frame 55x55mm) white, similar to RAL9010 (e.g. Busch Balance SI by Busch-Jaeger or Standard 55 by GIRA, etc.)

USB-C Port: 45-Watt power supply with power delivery (PD) fast charging, for fast and safe charging of laptops, tablets, smartphones, wearables and further small electronic devices

USB-A Port: 15 Watt power supply with fast charging, for fast and safe charging of smartphones, wearables and further small electronic devices


Variable power adjustment: up to 45W

USB-C and USB-A support different charging protocols e.g. Apple, Samsung, Quick Charge version 4.0+, PD 3.0 etc.

Screw terminal to connect wires of the house installation, up to 2,5mm² max. (2xL/2xN – for easy looping in multiframes)










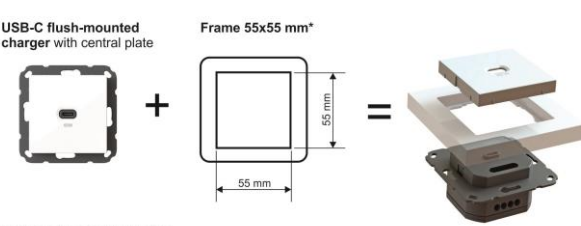



EHMANN advantage - 100% quality control, 5 years warranty

EHMANN quality – High-grade manufacturing and reliable function



USB-A/C flush-mounted charger T65.01 Kombi with Power Delivery (PD)

Technical data

1x USB-C Output, max 45W 1x USB-A Output, max 15W	110 - 230V / 50-60 Hz Input Voltage	5 - 20V Output Voltage																																										
 <p>USB-C flush-mounted charger with central plate + Frame 55x55 mm* = </p> <p>* Usable frames 55x55 mm</p> <table border="0"> <tr> <td>GIRA</td> <td>pure white</td> <td>Standard 55, E2, E22, Event, Esprit</td> </tr> <tr> <td>BUSCH JAEGER</td> <td>alpine white</td> <td>Busch balance SI</td> </tr> <tr> <td>JUNG</td> <td>alpine white</td> <td>A 500, A PLUS, A CREATION, AS 500, A550, A FLOW</td> </tr> <tr> <td>BERKER</td> <td>polar white</td> <td>S1, B3, B7</td> </tr> <tr> <td>MERTEN</td> <td>polar white</td> <td>1M, M-Smart, M-Plan, M-Pure</td> </tr> </table> <p>All listed white shades are similar to RAL9010</p>	GIRA	pure white	Standard 55, E2, E22, Event, Esprit	BUSCH JAEGER	alpine white	Busch balance SI	JUNG	alpine white	A 500, A PLUS, A CREATION, AS 500, A550, A FLOW	BERKER	polar white	S1, B3, B7	MERTEN	polar white	1M, M-Smart, M-Plan, M-Pure	<table border="1"> <thead> <tr> <th></th> <th>Professional</th> <th>Kombi</th> <th>Comfort</th> </tr> </thead> <tbody> <tr> <td> <ul style="list-style-type: none"> ● = Fast charging ○ = Slow charging ✘ = No charging / use at the same time </td> <td>  USB-C (45W max.) 5V/3A 15W 9V/3A 27W 12V/3A 36W 15V/3A 45W 20V/3.2A 65W </td> <td>  USB-C (45W max.) 5V/3A 15W 9V/3A 27W 12V/3A 36W 15V/3A 45W 20V/2.5A 50W USB-A (15W max.) 5V/3A 15W </td> <td>  USB-C (15W max.) 5V/3A 15W 9V/2A 18W 12V/1.5A 18W </td> </tr> <tr> <td>5W</td> <td>✓</td> <td>✓</td> <td>✓</td> </tr> <tr> <td>15W (max. 25W)</td> <td>✓</td> <td>✓</td> <td>✓</td> </tr> <tr> <td>18W (max. 30W)</td> <td>✓</td> <td>✓</td> <td>✓</td> </tr> <tr> <td>65W (max. 100W)</td> <td>✓</td> <td>○</td> <td>✘</td> </tr> <tr> <td> Wearables Smartphones Tablets Laptops </td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Professional	Kombi	Comfort	<ul style="list-style-type: none"> ● = Fast charging ○ = Slow charging ✘ = No charging / use at the same time 	 USB-C (45W max.) 5V/3A 15W 9V/3A 27W 12V/3A 36W 15V/3A 45W 20V/3.2A 65W	 USB-C (45W max.) 5V/3A 15W 9V/3A 27W 12V/3A 36W 15V/3A 45W 20V/2.5A 50W USB-A (15W max.) 5V/3A 15W	 USB-C (15W max.) 5V/3A 15W 9V/2A 18W 12V/1.5A 18W	5W	✓	✓	✓	15W (max. 25W)	✓	✓	✓	18W (max. 30W)	✓	✓	✓	65W (max. 100W)	✓	○	✘	Wearables Smartphones Tablets Laptops			
GIRA	pure white	Standard 55, E2, E22, Event, Esprit																																										
BUSCH JAEGER	alpine white	Busch balance SI																																										
JUNG	alpine white	A 500, A PLUS, A CREATION, AS 500, A550, A FLOW																																										
BERKER	polar white	S1, B3, B7																																										
MERTEN	polar white	1M, M-Smart, M-Plan, M-Pure																																										
	Professional	Kombi	Comfort																																									
<ul style="list-style-type: none"> ● = Fast charging ○ = Slow charging ✘ = No charging / use at the same time 	 USB-C (45W max.) 5V/3A 15W 9V/3A 27W 12V/3A 36W 15V/3A 45W 20V/3.2A 65W	 USB-C (45W max.) 5V/3A 15W 9V/3A 27W 12V/3A 36W 15V/3A 45W 20V/2.5A 50W USB-A (15W max.) 5V/3A 15W	 USB-C (15W max.) 5V/3A 15W 9V/2A 18W 12V/1.5A 18W																																									
5W	✓	✓	✓																																									
15W (max. 25W)	✓	✓	✓																																									
18W (max. 30W)	✓	✓	✓																																									
65W (max. 100W)	✓	○	✘																																									
Wearables Smartphones Tablets Laptops																																												
<p>Supported protocols:</p> <p>USB-C: PD3.0 with pps / QC4 / QC4+ / AFC / FCP / SCP / BC1.2 / Apple / Samsung</p> <p>USB-A: QC2.0 / QC3.0 / SCP / FCP / AFC / BC1.2 / Apple 2.4A protocol</p>																																												
<p>Connection: screw terminals up to 2,5 mm² (rigid)</p> <p>Power consumption/Stand-by: < 0,08W</p> <p>Short circuit/overload protection: electronic</p> <p>In order to guarantee maximum charging power, please pay attention to using original / PD charging cables.</p>																																												
<p>Before installing and using the device, please read the instruction manual carefully.</p>																																												
Item-no. 6560x0100	EAN 4012096011514	PU 10 Weight: net 100g																																										
		71 x 71 x 37 mm Dimension (L x W x H)																																										