

Cord dimmer T26.01

Item-no.: 2600x0100(i) (transparent) | 2620x0100(i) (black) | 2660x0100(i) (white)



Suitable for incandescent, HV- and LV-halogen lamps with electronic transformer

Integrated protective conductor terminal

With orientation light

Applicable as intermediate and end device due to different connection opportunities

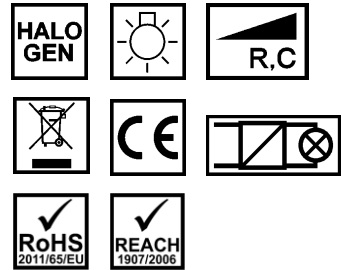
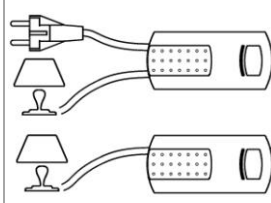
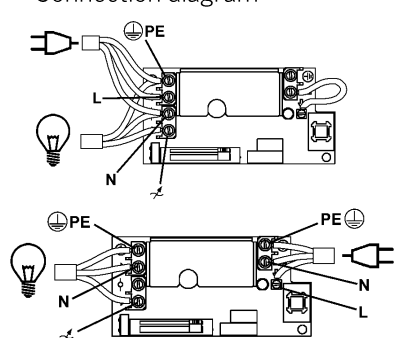
EHMANN advantage – 100 % quality check, 5 years warranty, German manufacturer

EHMANN quality – High-grade manufacturing and reliable function



Cord dimmer T26.01

Technical data

	20 – 300W/VA Rated power	230 V ~ (+/- 10%) / 50 Hz Rated voltage
Suitable for incandescent, HV- and LV-halogen lamps with electronic transformer		
<p>Operating principle: trailing edge</p> <p>Function: On /off via separate switch; dimming via slide switch (for hand- and foot use)</p> <p>Temperature protection: thermal fuse</p> <p>Max. cord diameter: 6,5 mm</p> <p>Cut-off: Complete cut-off</p> <p>Stand-by consumption (orientation light): <0,5 W</p> <p>Cycle of operation: >50.000</p> <p>Connection: Screw terminal 0,5 - 1,5 mm² (flexible)</p> <p>Mode of operation: S1</p> <p>Protection class: II</p> <p>Safety class: IP20</p> <p>Contamination level: 1</p>		
	Applicable as intermediate and end device	Connection diagram
		
<p>Item-no. 2600x0100(i) (transparent) EAN 401209600441 7 PU 10</p> <p>Item-no. 2620x0100(i) (black) EAN 401209626611 2 PU 10</p> <p>Item-no. 2660x0100(i) (white) EAN 401209626211 4 PU 10</p>	<p>130 x 59 x 35 mm</p> <p>Dimensions (L x W x H)</p>	