

# Overvoltage protection line filter socket strip 5-fold with switch

Item-No.: 0207x00052301 (1,5 m cord) | 0207x00052303 (3 m cord) | 0207x00052305 (5 m cord)



Robust plastic, grey

Built-in sockets (90° rotated), round

Extra large space in between sockets 64 mm

1,5 m power cord and angle plug (optional with 3 m or 5 m power cord)

Expanded contact protection by using a shutter

End caps with mounting possibility and spare fuse

Optical function display and acoustic fault message



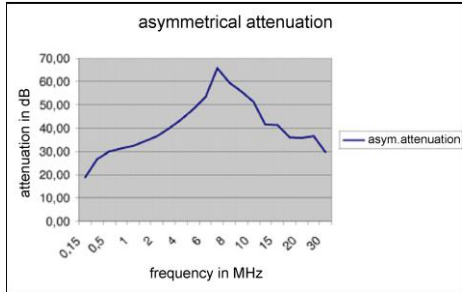
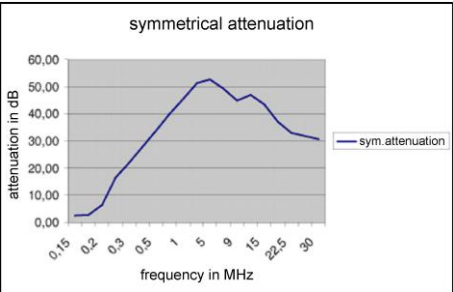
Line filter as protection against high-frequency interference with the network

EHMANN advantage - the connected devices will remain in operation after release of overvoltage protection



## Overvoltage protection line filter socket strip 5-fold with switch

### Technical data

<b>3.600 W Power</b>	<b>250 V ~ / 50 Hz Rated voltage</b>	<b>16 A Rated current</b>	
<p>Power Cord: H05VV-F 3G 1,5 mm<sup>2</sup>            Plug: CEE 7/7 plug Type EF, angled            Sockets: earthing contact Type F            Switch: 2-pole, illuminated            Consumption per switch: &lt; 0,5 W            Voltage U<sub>n</sub>: 230 V~            Max. continuous operation voltage U<sub>c</sub>: 255 V~            U<sub>oc</sub>: 5000 V            Protection level Up: L-N &lt; 1,0kV - L/N-PE &lt; 1,5kV            I<sub>max</sub> (8/20): 6,5 kA            Fuse: T6,3AH/250 V            SPD according to EN 61643-11: Typ3            Consumption overvoltage protection: &lt; 0,1 W</p>  <p>(similar illustration)</p>			
 <p>asymmetrical attenuation</p>		 <p>symmetrical attenuation</p>	
Item-No. 0207x00052301 (1,5 m cord)	EAN 401209602421 7	PU 10	590 x 74 x 47 mm Dimensions (L x W x H)  582 mm Fixing Dimension
Item-No. 0207x00052303 (3 m cord)	EAN 401209602465 1	PU 10	
Item-No. 0207x00052305 (5 m cord)	EAN 401209602466 8	PU 7	